

456-DP



Benefits

- Automatic control of water volume
- High reserve due to adjustment range up to 290 l/h
- Patented, simple valve insert provides protection against pollution

Versions

combination block 456-DP

	Version	Nominal diameter	Connection		Part no.
			To radiator	To pipe	
	Straight	DN 15	G½ male	G¾ male eurocone	423 071
	Angled	DN 15	G½ male	G¾ male eurocone	423 021
	Straight	DN 15	G¾ female	G¾ male eurocone	423 070
	Angled	DN 15	G¾ female	G¾ male eurocone	423 020

Blue part no. = in-stock items

Technical specifications

System connection

See ordering table

Adjustment range

20/340 l/h

Nominal pressure

Max. 10 bar

Differential pressure (Δp)

Max. 70 kPa

Min. 15 kPa

Nominal diameter

DN 15


Operating temperature range

Medium: Max. 90 °C

Housing

Gunmetal, nickel-plated

Detail views

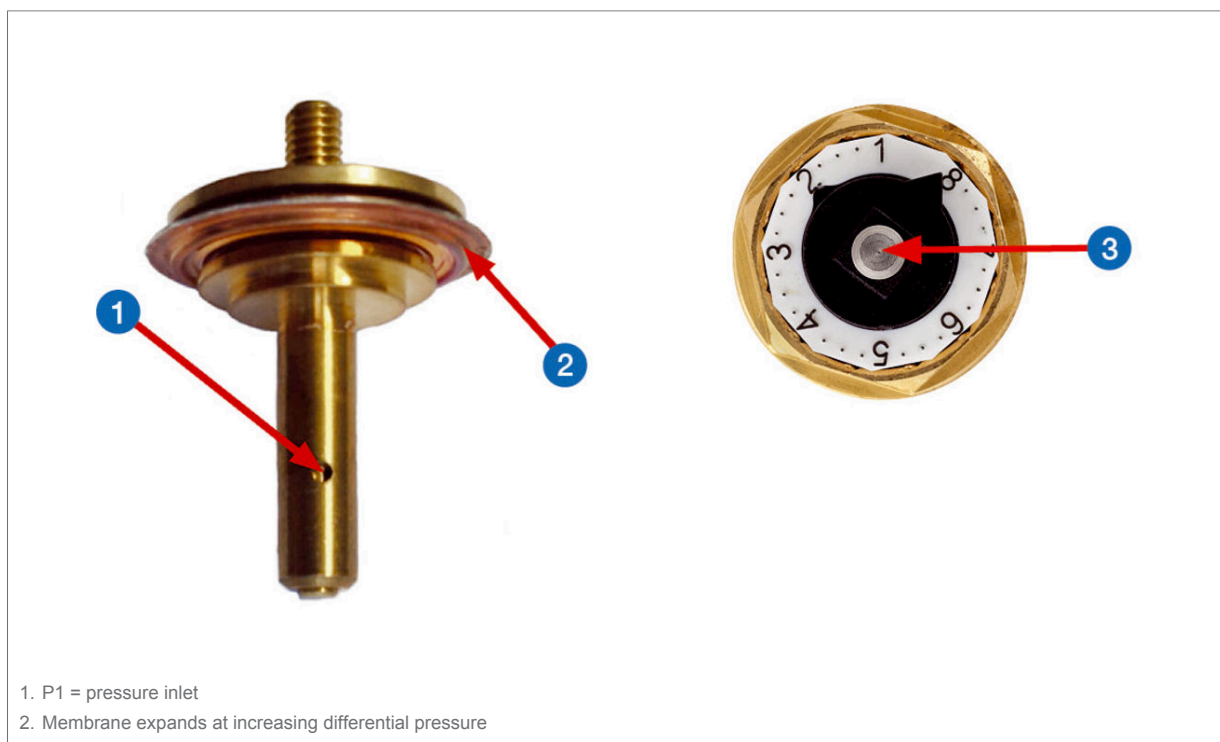



Technical drawings

