# **Universal filters AF-UK 75**



## Benefits

- Optimum filtration of particulate matter
- With or without liquid alarm sensors
- Easy, fast wall mounting
- Bypass function

## Application

For filtration of solid matter.

#### Versions

	Part no.
Universal filters AF-UK 75 with condensate drain	61610
	Blue part no. = in-stock items

#### Description

Unheated universal filter for optimum filtration performance and removal of extremely small particles with filter elements with high filter fineness. Versions with or without conductivity based liquid alarm sensors. The sensor can detect the breakthrough of liquids (e.g. if a gas dryer is used upstream of the unit). If condensate water breaks through, the stream flow effect directs the drops to the sensor. The control unit of the liquid alarm sensor has a relay output that can be used to activate a pump or a solenoid valve or to signal an alarm. If condensate breaks through, the filter housing acts as a buffer space so that the liquid cannot immediately reach other components. The universal filter can be equipped with various filter elements (ceramic, glass fibre, PTFE, stainless steel). The elements are available with different filter fineness ratings to cover all possible applications.

The liquid sensor detects and signals moisture, e.g. is the upstream gas dryer is defective. The liquid alarm sensor operates on the basis of the measuring principle of electric conductivity.



Lun

## **Technical specifications**

Operating temperature range Medium: Max. 100 °C

PTFE

Duran glass

Material

Input:

Filter head: Filter body:


Gas inlet/gas outlet

G¼ female At the side Output: At the side

Gas pressure Max. 1 bar

#### **Detail views**

#### Universal filter AF-U

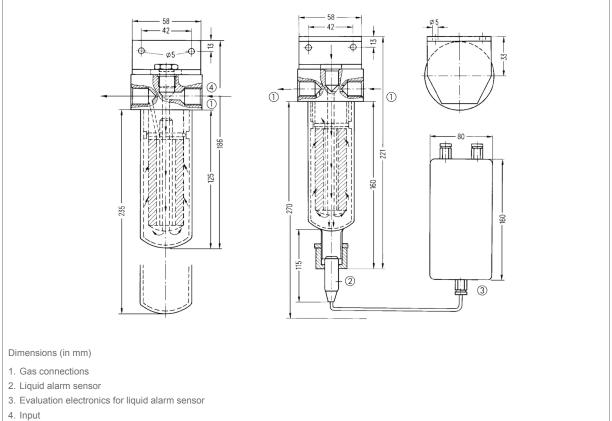

Filter insert

Teflon (PTFE)

Filter fineness

Filter surface

Condensate outlet

Approx. 0.31 kg

2 µm

70 cm<sup>2</sup>

GL 25

Weight

AFRISO



## **Technical drawings**

### Universal filter AF-U

